

## 22840\*\* 2.8 (.110) TYPE SERIES · MALES FOR CONNECTOR



**Specification** Connectors

**Ways** 1

**Thermal Characteristics**

Part nr.	Raw material	Color	Flammability Class (UL 94)	Glow Wire Test (GWT) (IEC60695-2-11)	Glow Wire Flammability Index (IEC60695-2-12)	RTI electrical (Max. Operating Temp.)
2284010	PA66V2	Natural	V2	(T.B.D.)	850°C	105°C
2284040	NO FLAME	Natural	V2	750°C	960°C	130°C

For other materials and colors ask to: [info@escubedo.com](mailto:info@escubedo.com)

**Compatible terminals** 6401.\*\*, 6402.\*\*, 6402E\*\*, 6402F\*\*, 6408E\*\*


**Approved regulations**

Part nr.	Approval	Standard	File	Certified framework
2284010	UL	UL 310	E245592	V2/RTI Elec. Max. Operating Temp, 105°C
2284040	UL	UL 310	E245592	V2/RTI Elec. Max. Operating Temp, 130°C

**Approvals**



**Drawing**

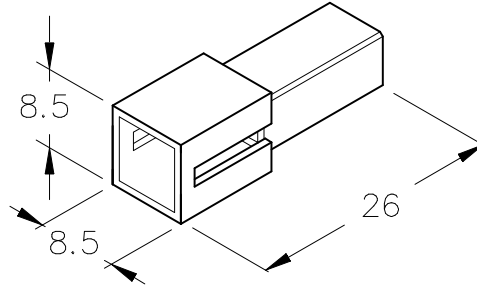

(T.B.D.): To be determined

**Disclaimer**

Data obtained from Escubedo Laboratory essays, using own methodology, cabling, equipment and original crimping tools, done in laboratory conditions and following the indicated standards, errors and omissions excepted. This document has no contractual meaning and it is publicised only for informative purposes. It can be changed without prior notice. The end customer has the sole responsibility to check these characteristics in its environment and with its own components, manufacturing methods and equipment. See also the full range product overview if available. For further information please visit our web site or contact us

Rev. Nr.	Concept	Date	Created/Revised	Approved
A1	Datasheet generated automatically [A1]	2022-06-01	M.Codina (Engineering dept.)	E.Roura (Laboratory dept.)

Escubedo Connection Systems, S.A.U. · Ctra. de Girona-Olot Km. 35,5 · 17843 Riudellots de la Creu · Girona · Spain  
Tel.: 34 972 171 706 · Fax: +34 972 171 714 · [info@escubedo.com](mailto:info@escubedo.com) · [www.escubedo.com](http://www.escubedo.com)