

5820.** 6.3 (.250) TYPE SERIES · FLAGS



Specification	Low insertion
For male (mm)	6,3x0,8
Wire size mm² (AWG)	0,5-1,5 (20-16)
Ø Insulation (mm)	1,9-3,3

Materials, temperature and contact resistance

Part nr.	Material	Finishing	Max. Temp. (°C)
5820.00	Brass	Natural	110
5820.01	Brass	Pre-tin-plated	120
5820.30	Bronze	Natural	120
5820.31	Bronze	Pre-tin-plated	130
5820.24	Steel	Nickel-plated	300
5820.70	German Silver	Natural	210

Material thickness (mm) 0,4

Max. rated current

Wire section	5820.00 / 01 / 30 / 31 / 24 / 70
0.50 mm ²	8A
0.75 mm ²	10A
1.00 mm ²	12A
1.50 mm ²	16A

Insertion / Withdrawal forces

	5820.00 / 30 / 70	5820.01 / 31 / 24
1st Insertion (max)	35N ¹	35N ¹
1st Withdrawal (max)	60N ¹	60N ¹
1st Withdrawal (min)	27N ¹	22N ¹
6th Withdrawal (min)	22N ¹	18N ¹

¹ Valid for Natural Brass Tab

Application tool

MN5820

Crimping parameters & pull out force

Wire section (±10%)	Conductor 		Insulator 	Pull-out force (N)
	Height (mm)	Width (mm)	Width (mm)	
0.50 mm ²	1.40 (±0.03)	2.48 (±0.03)	3.60 (±0.10)	56N @ 60s
0.75 mm ²	1.45 (±0.05)	2.48 (±0.05)	3.60 (±0.10)	84N @ 60s
1.00 mm ²	1.50 (±0.05)	2.51 (±0.05)	3.60 (±0.10)	108N @ 60s
1.50 mm ²	1.65 (±0.05)	2.53 (±0.05)	3.60 (±0.10)	150N @ 60s

Values only valid for the application tool specified upwards. The insulator widths are only indicative as they are dependent on the sheath thickness of the wire used.

Winding number 3500

Compatible connectors 26333**, 26336**

Approved regulations

Part nr.	Approval	Standard	File	Certified framework
5820.00	UL	UL 310	E211727	AWG 20-18 (10-16 Stranded Cu) / MN5820
5820.00	VDE	EN 61210	5000955-1433-0001 / 242926 / TL6 / RHZ	0,5 ... 1,5mm ² . 110°C max
5820.01	UL	UL 310	E211727	AWG 20-18 (10-16 Stranded Cu) / MN5820
5820.24	UL	UL 310	E211727	AWG 20-18 (10-16 Stranded Cu) / MN5820

5820.**


6.3 (.250) TYPE SERIES · FLAGS



Approvals




Drawing

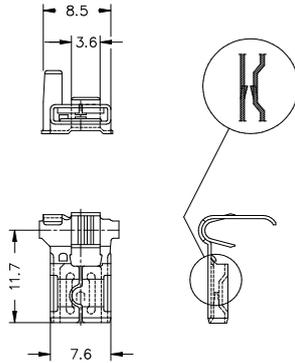


5820.00 NATURAL BRASS
6.3 (.250) TYPE SERIES · FLAGS



Derating curve Current carrying capacity vs. Ambient temperature

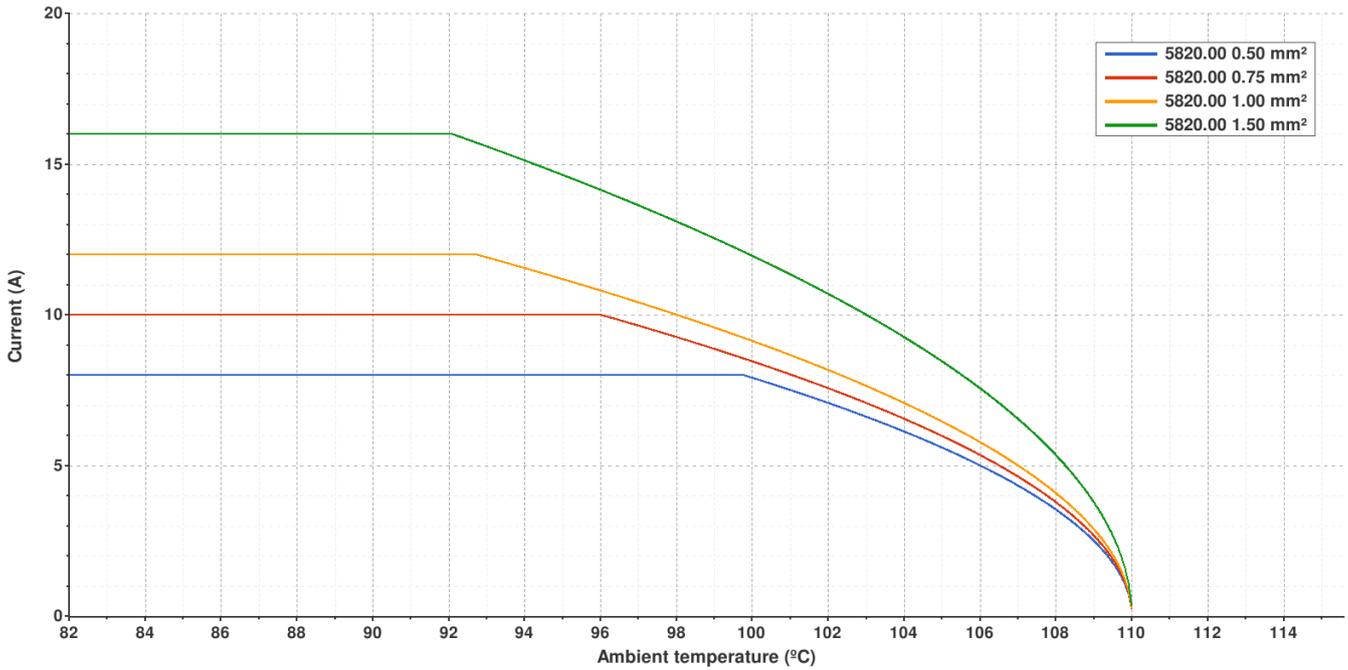

Temperature rise curve Terminal temperature rise due to the current carried

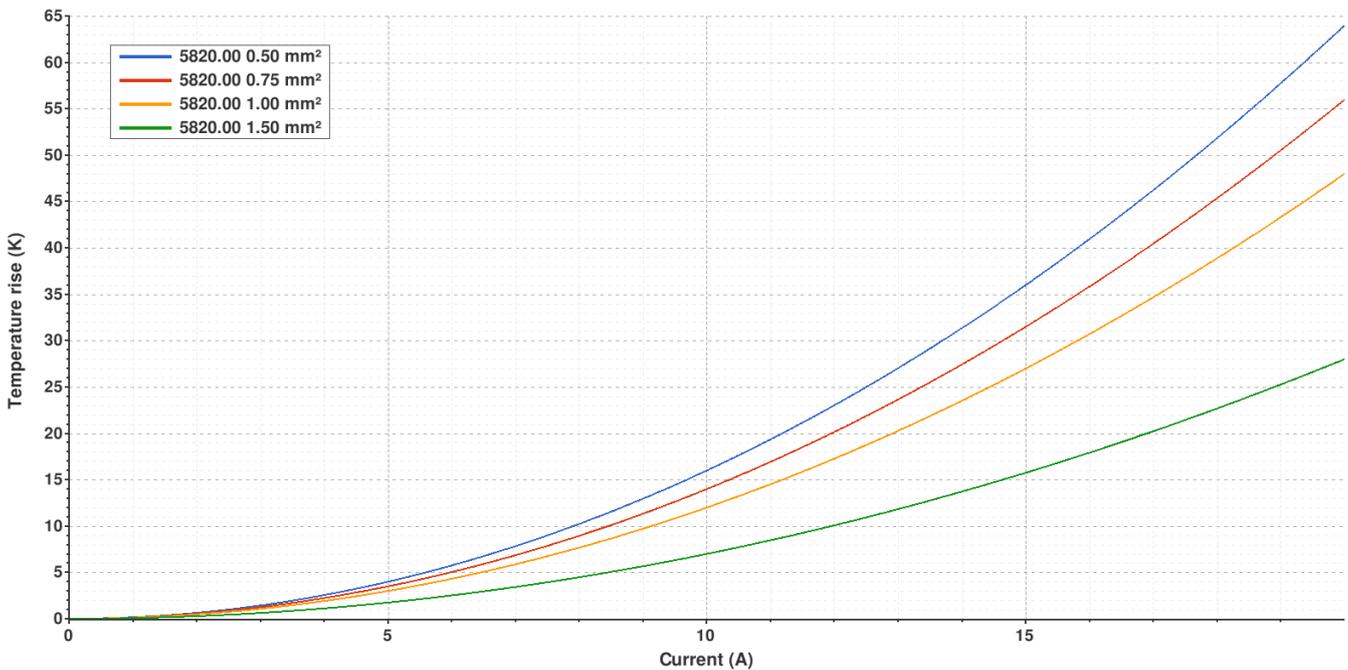


Valid for Natural Brass Tab


5820.01 PRE-TIN-PLATED BRASS
6.3 (.250) TYPE SERIES · FLAGS



Derating curve Current carrying capacity vs. Ambient temperature

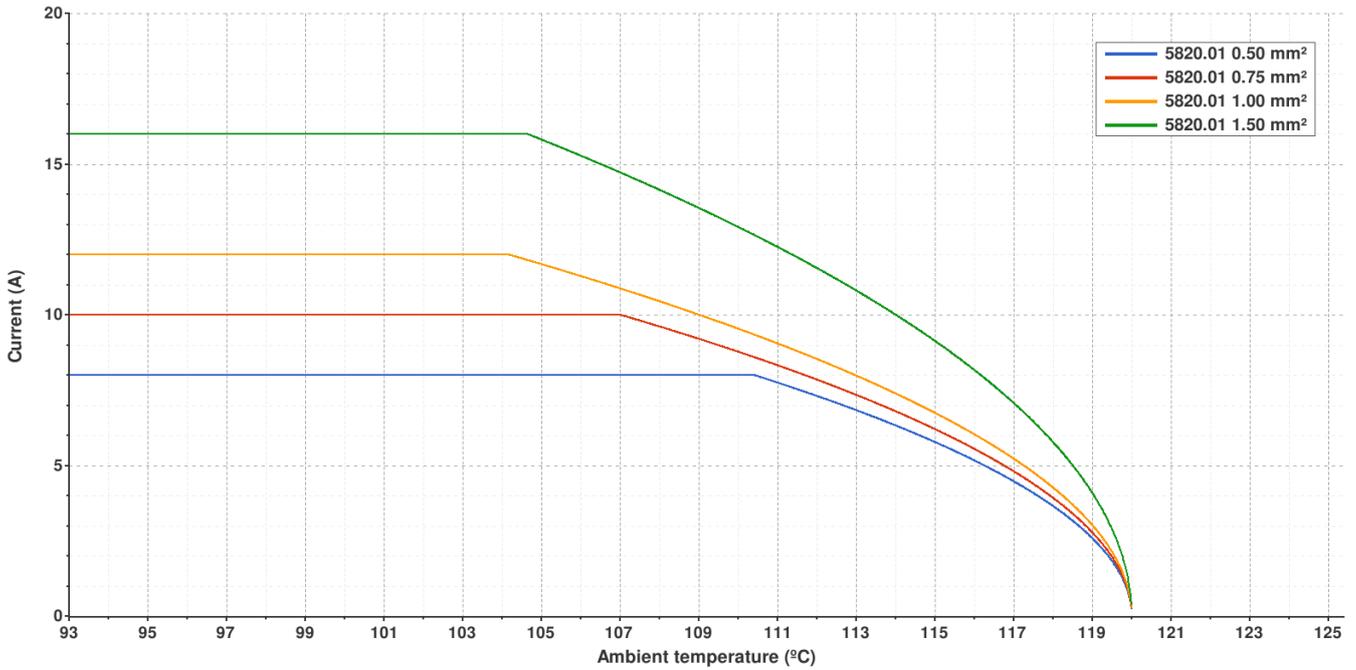

Temperature rise curve Terminal temperature rise due to the current carried

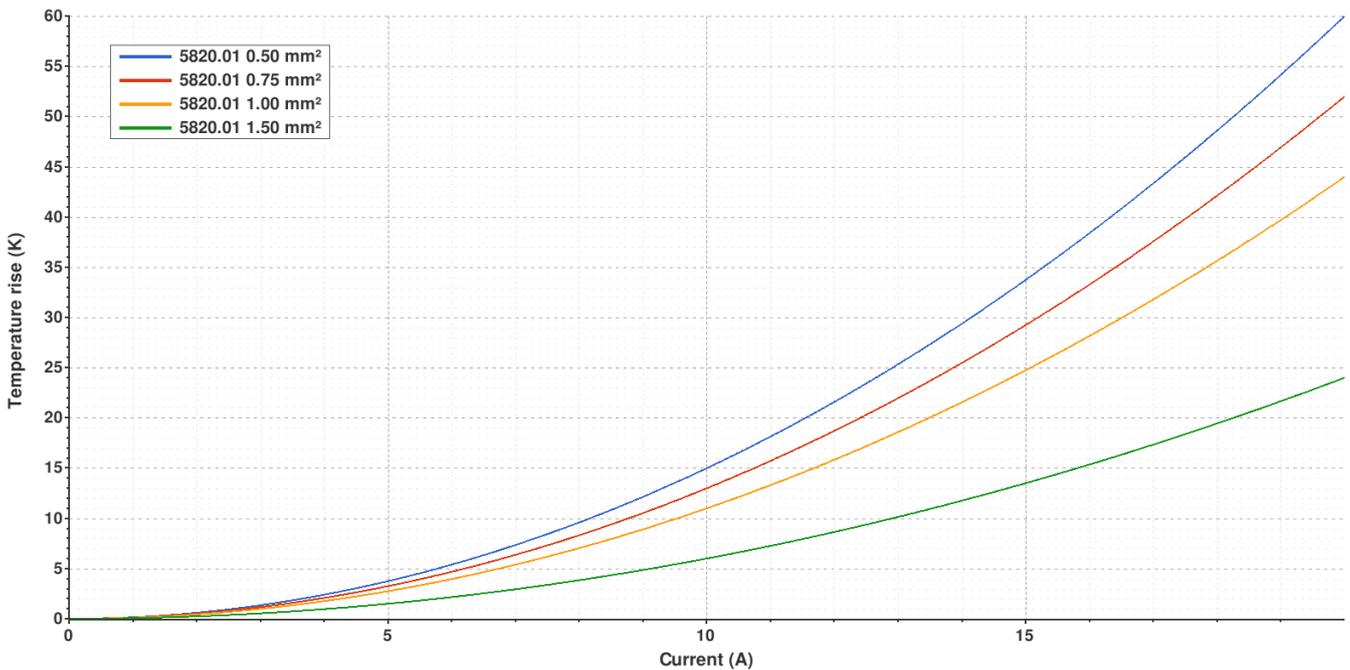


Valid for Natural Brass Tab


5820.24 NICKEL-PLATED STEEL
6.3 (.250) TYPE SERIES · FLAGS



Derating curve Current carrying capacity vs. Ambient temperature

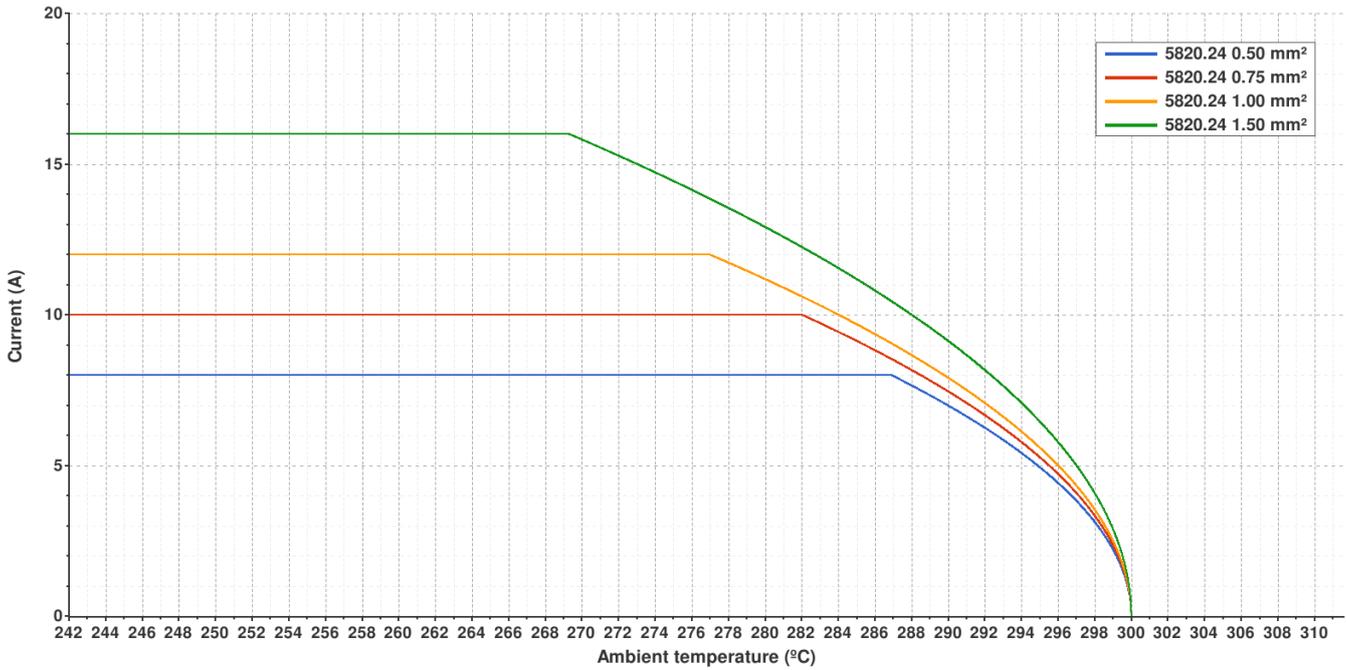

Temperature rise curve Terminal temperature rise due to the current carried

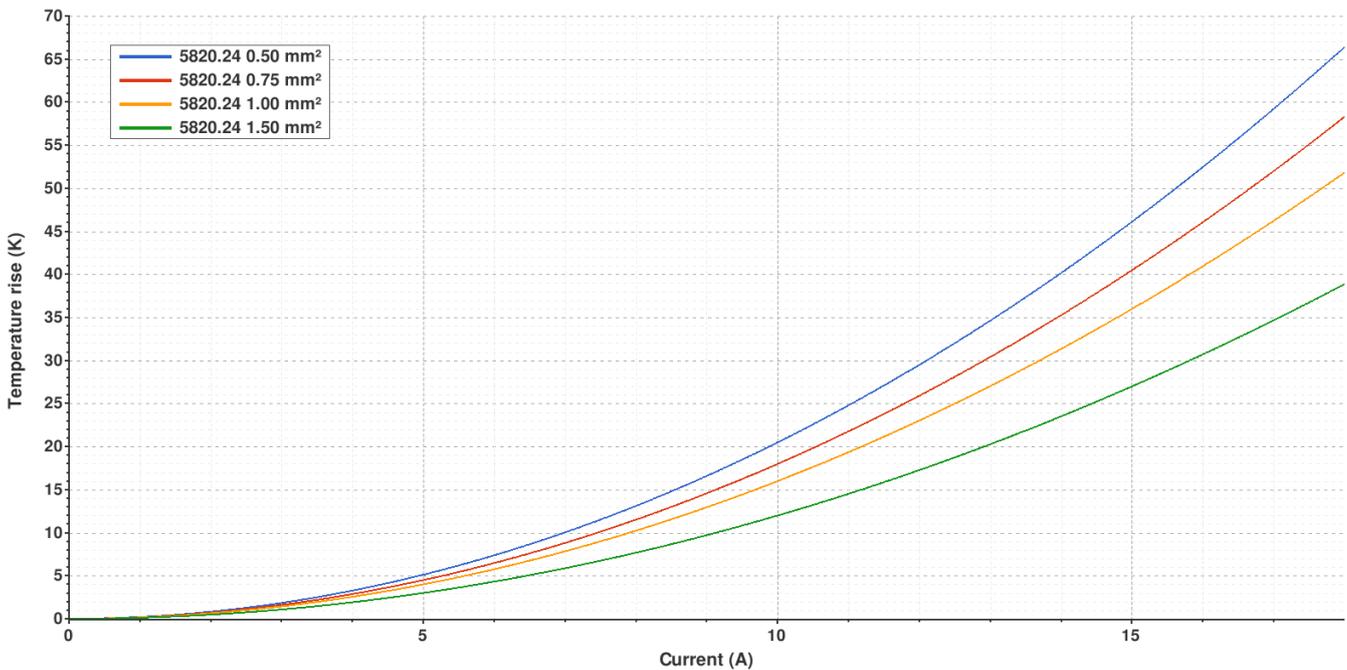

Valid for Natural Brass Tab

5820.** 6.3 (.250) TYPE SERIES · FLAGS



Disclaimer

Data obtained from Escubedo Laboratory essays, using own methodology, cablings, equipment and original crimping tools, done in laboratory conditions and following the indicated standards, errors and omissions excepted. This document has no contractual meaning and it is publicised only for informative purposes. It can be changed without prior notice. The end customer has the sole responsibility to check these characteristics in its environment and with its own components, manufacturing methods and equipment. See also the full range product overview if available. For further information please visit our web site or contact us

Rev. Nr.	Concept	Date	Created/Revised	Approved
A6	Update insulation crimp specifications	2023-01-27	Laboratory Dept.	E. Roura (Laboratory Dept.)
A5	Update insertion and withdrawal forces	2021-11-12	E. Roura (Laboratory Dept.)	O. Roura (Engineering Dept.)
A4	Change company name and logo	2021-10-21	E.Roura (laboratory dept.)	M.Codina (engineering dept.)
A3	Approved regulations updated	2021-02-08	E.Roura (laboratory dept.)	M.Codina (engineering dept.)
A2	Update electric curves (de-ratint)	2020-10-16	Laboratory Dept.	E. Roura
A1	Datasheet generated automatically [A1]	2018-07-23	Laboratory Dept.	E. Roura