

8704.** UP-MOD 2.54 · RECEPTACLES FOR CONNECTOR



Specification UP-MOD Receptacles. 2.54 mm series

For male (mm) 0,63x0,63

Wire size mm² (AWG) 0,04-0,08

Ø Insulation (mm) 0,64-1,27

Materials, temperature and contact resistance

Part nr.	Material	Finishing	Max. Temp. (°C)
8704.31	Bronze	Pre-tin-plated	130

Material thickness (mm) 0,22

Application tool MN8704

Winding number 20000

Compatible connectors 22402**, 22404**, 22408**, 22416**, 22502**, 22504**, 22506**, 22508**, 22509**, 22510**, 22512**, 22516**, 22522**, 22524**, 22544**

Approved regulations


Part nr.	Approval	Standard	File	Certified framework
8704.31 ¹	UL	UL 1977	E223221	AWG 26 / MN8704

¹ Cat. No. meets with the standard UL1977 as a component of UP-MOD full connection system.
Rated current and voltage:
AWG 26 - 3A/250V (USR)
AWG 26 - 2A/250V (CND)

Approvals



Drawing

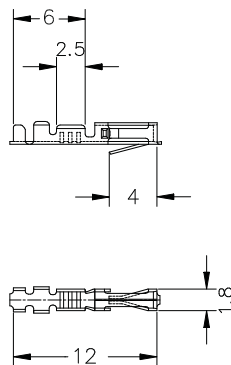

Disclaimer

Data obtained from Escubedo Laboratory essays, using own methodology, cabling, equipment and original crimping tools, done in laboratory conditions and following the indicated standards, errors and omissions excepted. This document has no contractual meaning and it is published only for informative purposes. It can be changed without prior notice. The end customer has the sole responsibility to check these characteristics in its environment and with its own components, manufacturing methods and equipment. See also the full range product overview if available. For further information please visit our web site or contact us

Rev. Nr.	Concept	Date	Created/Revised	Approved
A2	Change company name and logo	2021-10-21	Laboratory Dept.	E. Roura
A1	Datasheet generated automatically [A1]	2019-02-21	Laboratory Dept.	E. Roura