

**5715.\*\***

**4.8 MM (.187) UP-TPSEK FLAG TERMINALS**



**Description** Basic self-locking under TP design flag receptacles Low insertion for tab 4.8\*0.80

**Wire section range** 0.30 – 0.75 mm<sup>2</sup> (AWG 22 - 18)

**Max. Insulator Ø** 2.1 mm.

**Materials, Temperature & Contact resistance**

Part nr.	Material	Finishing	Max. temp. (C°)	Resist. (mΩ)
5715.00	Brass	Natural	110	(T.B.D.)
5715.01	Brass	Pre-tin plated	120	(T.B.D.)
5715.24	Steel	Nickel-plated	300	(T.B.D.)

**Notes:** Temperatures as per IEC 61210 standard.  
Maximal contact resistance: only contact zone

**Material thickness** 0,35 mm

**Max. Rated current**

Wire section (mm <sup>2</sup> )	Current (A)
0.30	N/A
0.50	8
0.75	10

**Note:** Current carrying capacity according to wire size ( IEC 60760 )



**Insertion/Withdrawal forces**

1st. Insertion	25 N Max
1st. Withdrawal	70 N Min

**Application tool** MN5713

**Wire striping length** 2.70 (±0.5) mm


**Crimping parameters & Pull out force**

Wire section (mm <sup>2</sup> ±10%)		Conductor (±0,05)		Insulator (±0,15)	Pull-out force (N)	
Nominal	Actual	Height (mm.)	Width (mm.)	Width (mm.)	DIN64249	ESCUBEDO
0.30	0.31	1.20	1.75	(T.B.D.)	N/A	>50
0.50	0.45	1.25	1.75	(T.B.D.)	≥ 80	>85
0.75	0.71	1.30	1.75	(T.B.D.)	≥ 120	>125

**Note:** Values only valid for the application tool specified upwards. The insulator widths are only indicative as they are dependent on the sheath thickness of the wire used.

**Packaging** 5000 Pieces on 16 mm. cardboard reel, 8 mm terminal chain pitch

**Drawing**

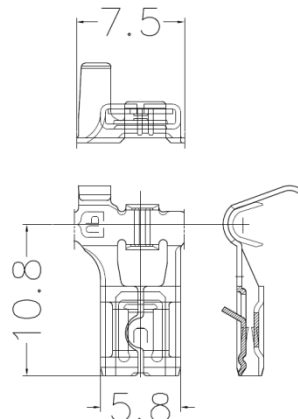

**Approvals**

- RoHS Compliant



**Note:**  
(T.B.D.): To be determined

**Disclaimer**

Data obtained from Escubedo Laboratory essays, using own methodology, cabling, equipment and original crimping tools, done in laboratory conditions and following the indicated standards, errors and omissions excepted. This document has no contractual meaning and it is publicised only for informative purposes. It can be changed without prior notice. The end customer has the sole responsibility to check these characteristics in its environment and with its own components, manufacturing methods and equipment. See also the full range product overview if available. For further information please visit our web site or contact us.

Rev. Nr.	Modification	Date	Created/Revised	Approved
1	Creation	12/06/2014	D.Martinez/E.Roura	J.C.Sanchez
2	Update crimp width	29/07/2014	D.Martinez/E.Roura	J.C.Sanchez
3	Update	27/08/2014	D.Martinez/E.Roura	J.C.Sanchez